AMoDeus Simulation Report

Simulation Information

User: Timostamp	root 2019/04/26 - 13:39:41
Timestamp:	2019/04/20 - 15:59:41
Iterations:	1 ,i.e., 0 in matsim config.
AV File <u>AV_Config File</u>	
Dispatcher:	AidoDispatcherHost
Rebalancing Period:	-00:00:01
Redispatching Period:	00:00:10
Network:	null_prepared
Virtual Nodes:	no virtual network found
Population:	500
Number of Vehicles:	20
Number of Requests	500




Aggregated Results

Distance Ratio:	42.08%
Occupancy Ratio:	17.86 %
Distances	
Total:	19487.58 km
Rebalancing:	899.07 km (4.61%)
Pickup:	10389.03 km (53.31%)
With Customer:	8199.48 km (42.08%)


Average Trip Distance:

16.40 km

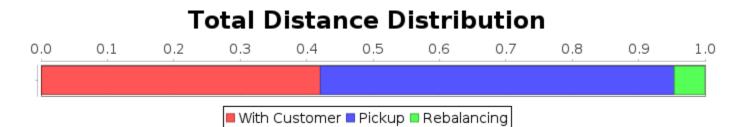


Wait Times


10.0% quantile	00:04:53
50.0% quantile	00:13:47
95.0% quantile	00:50:07
Mean	00:18:15
Maximum:	01:17:19

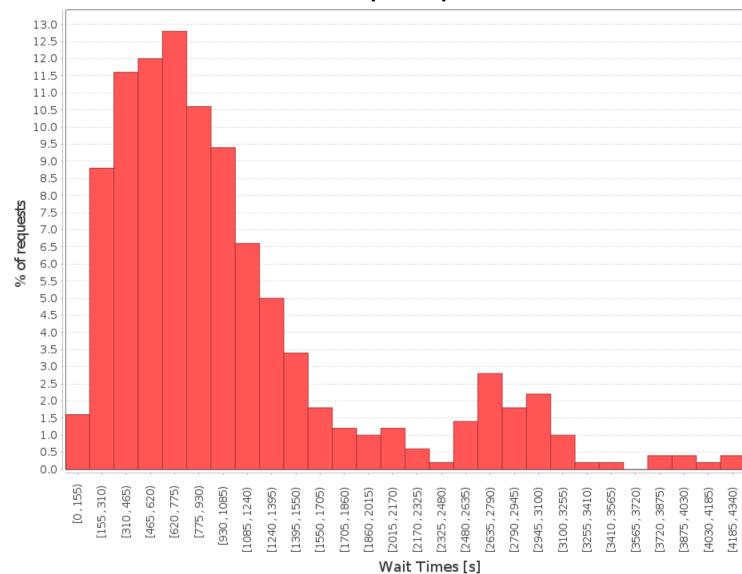

Number of Requests per Wait Time

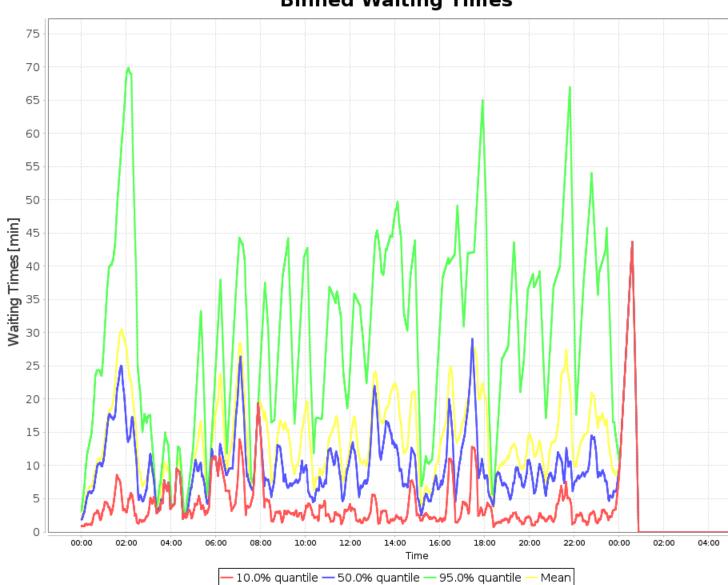


Binned Waiting Times

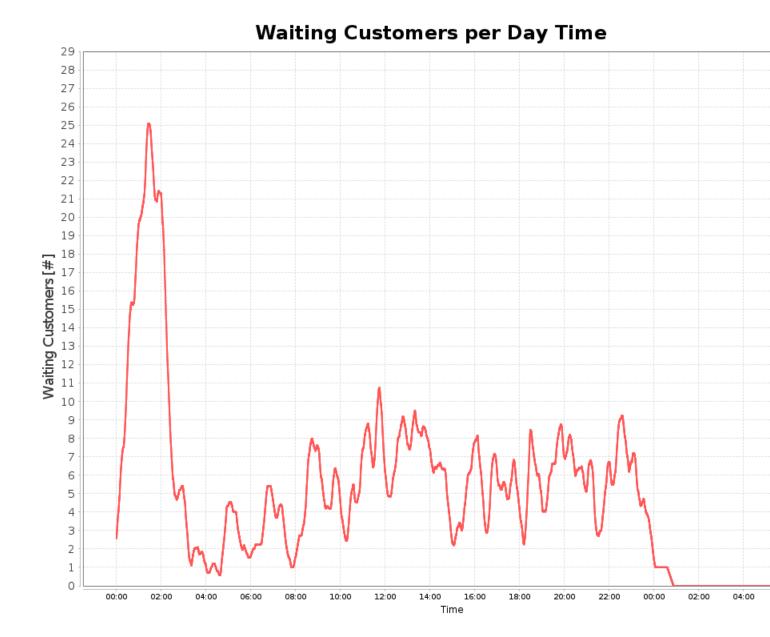

Drive Times


10.0% quantile	00:03:40
50.0% quantile	00:09:10
95.0% quantile	00:45:30
Mean	00:12:51
Maximum:	01:12:20

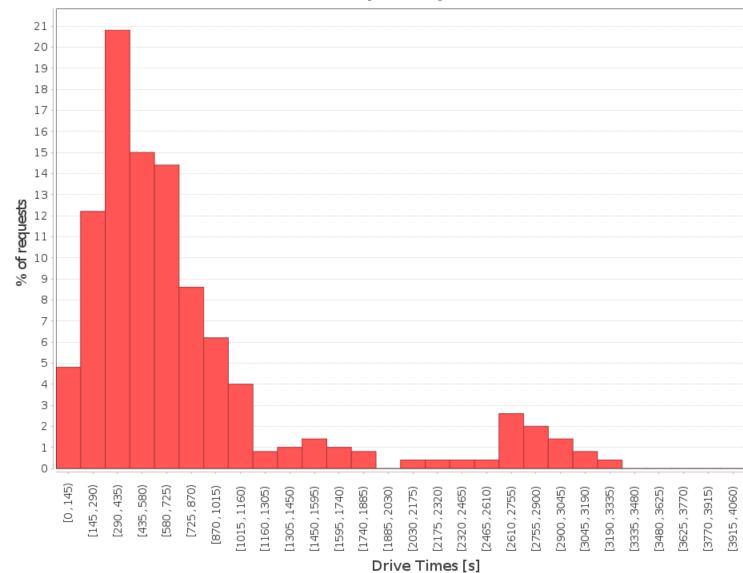


Number of Requests per Drive Time

Total Journey Times


00:11:15
00:23:35
01:21:15
00:31:06
01:58:09

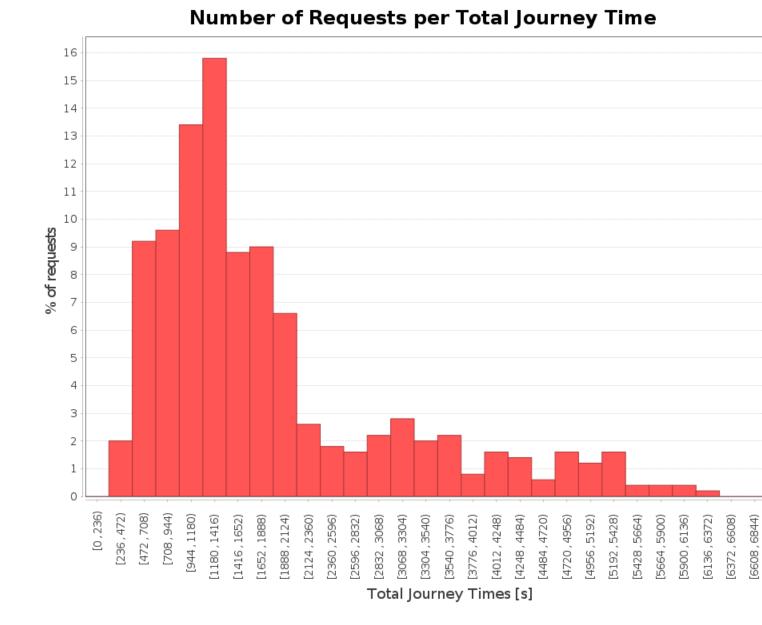

Fleet Efficiency

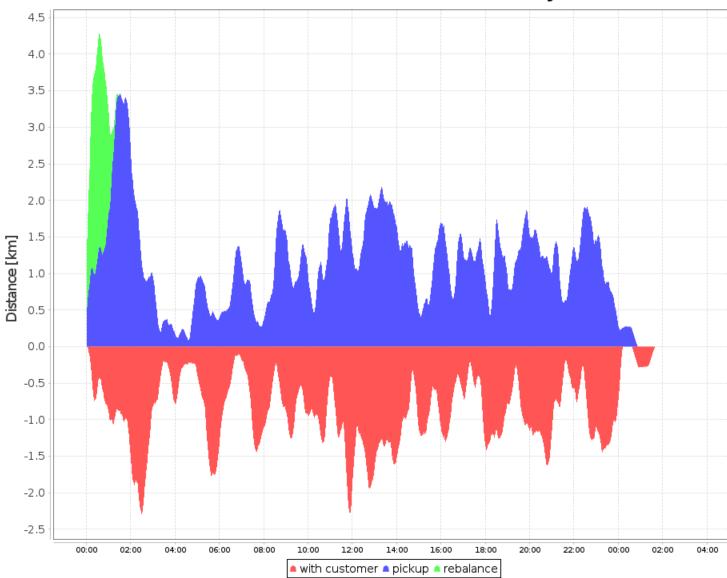


Distance Distribution over Day

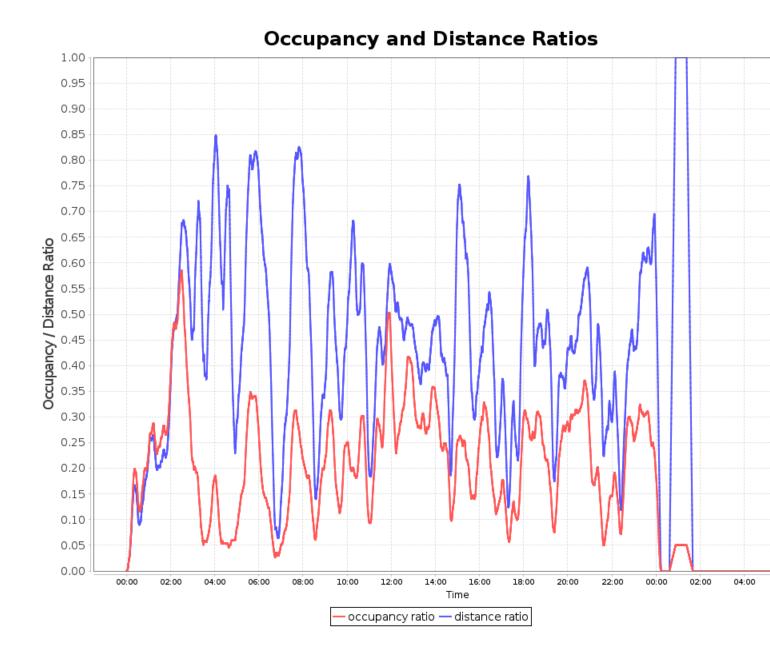





Aido Scores

Scores during Simulation

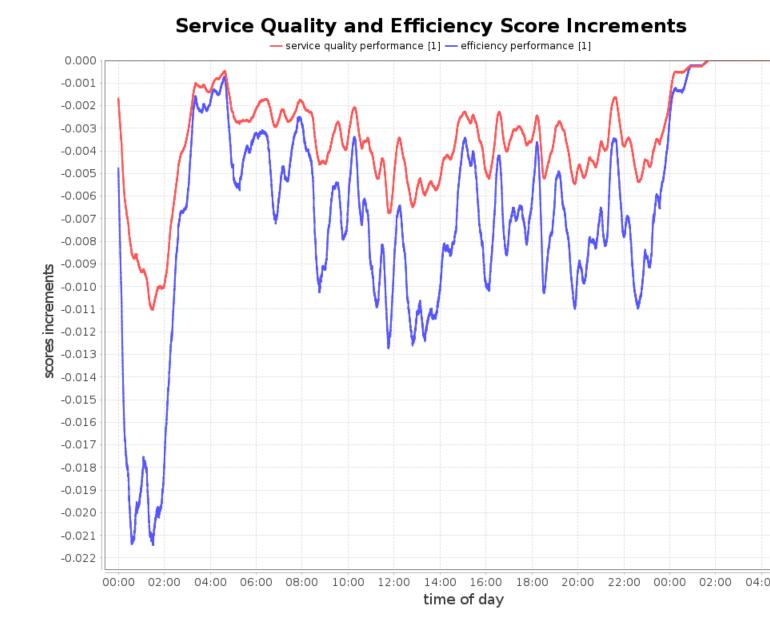

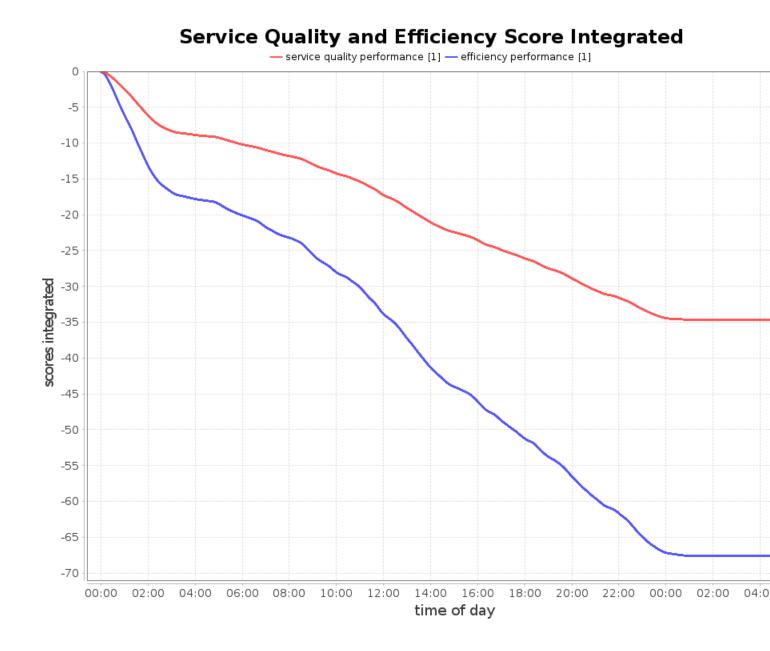

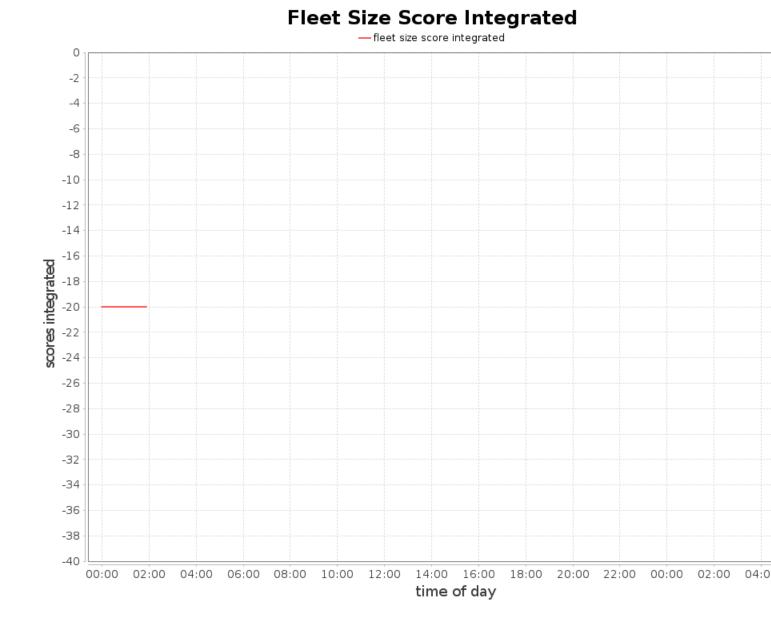

Final Scores

final service quality score: final efficiency score:

final fleet size score:

-34.68081534021401 -67.60930136085604 -Infinity

www.amodeus.science www.idsc.ethz.ch