AMoDeus Simulation Report

Simulation Information

User: Timestamp:	root 2019/04/26 - 13:50:25
Thirdstamp.	2013/04/20 13.30.20
Iterations:	1 ,i.e., 0 in matsim config.
AV File AV_Config File	
Dispatcher:	AidoDispatcherHost
Rebalancing Period:	-00:00:01
Redispatching Period:	00:00:10
Network:	null_prepared
Virtual Nodes:	no virtual network found
Population:	500
Number of Vehicles:	20
Number of Requests	500




Aggregated Results

Distance Ratio:	43.66%
Occupancy Ratio:	17.86 %
Distances	
Total:	18771.11 km
Rebalancing:	711.50 km (3.79%)
Pickup:	9864.95 km (52.55%)
With Customer:	8194.67 km (43.66%)


Average Trip Distance:

16.39 km

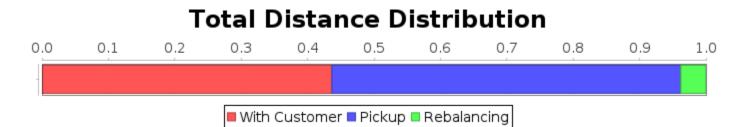



Wait Times

10.0% quantile	00:05:06
50.0% quantile	00:12:12
95.0% quantile	00:47:46
Mean	00:16:16
Maximum:	01:18:59

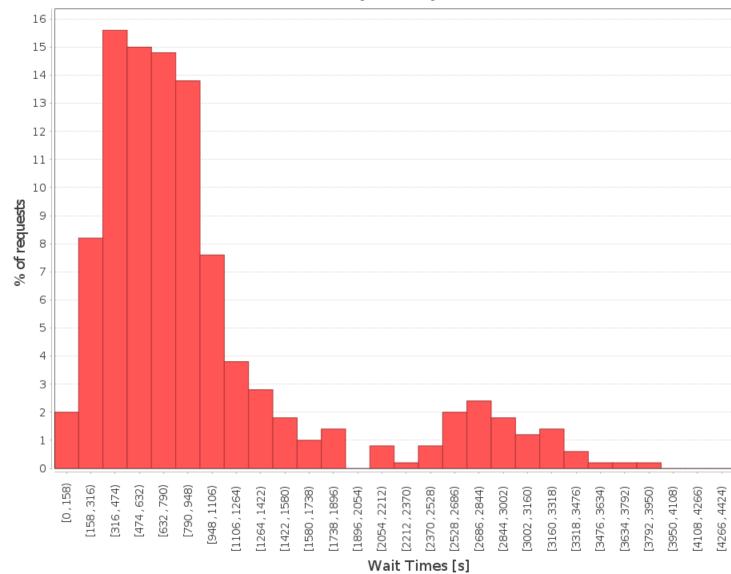


Number of Requests per Wait Time

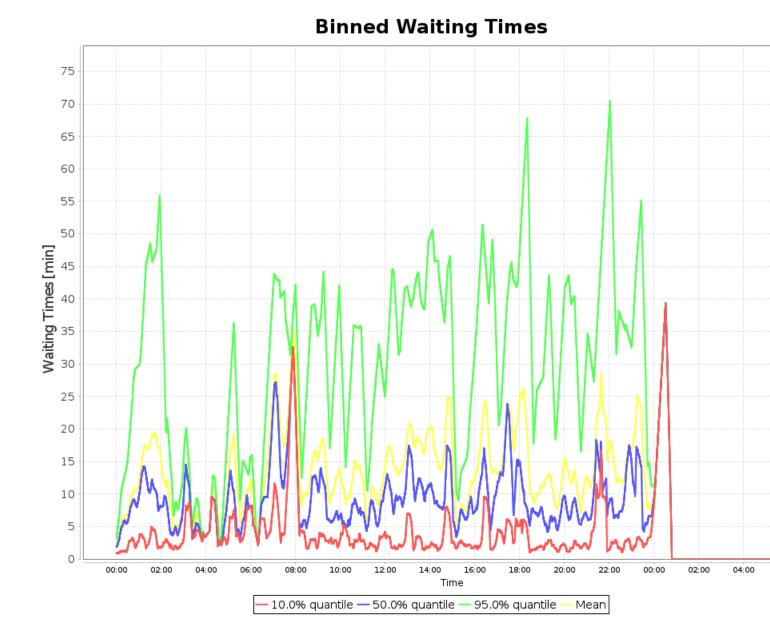

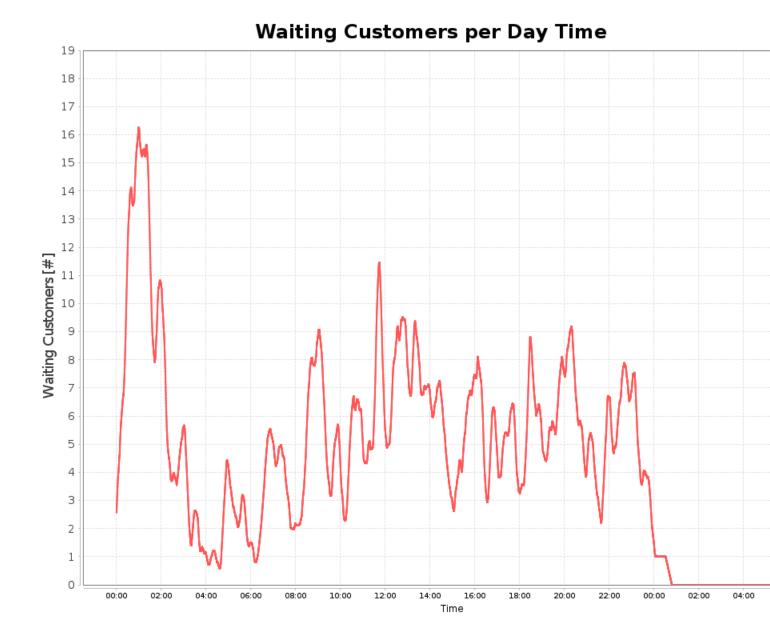

Drive Times


10.0% quantile	00:03:30
50.0% quantile	00:09:10
95.0% quantile	00:45:30
Mean	00:12:51
Maximum:	01:12:20

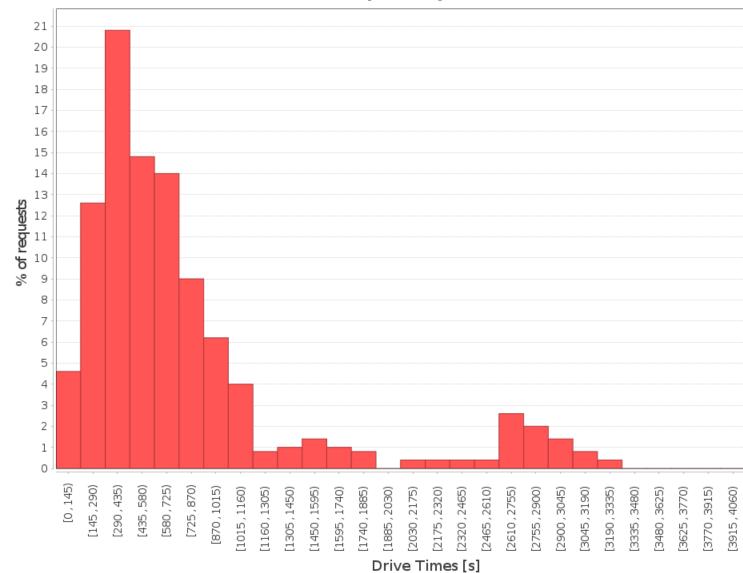

Number of Requests per Drive Time


Total Journey Times

00:11:50
00:22:13
01:19:19
00:29:08
01:59:06

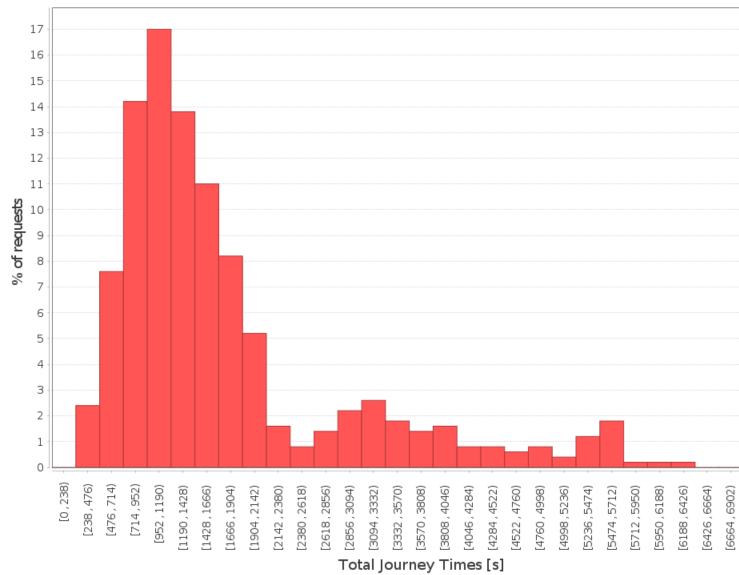



Number of Requests per Total Journey Time

Fleet Efficiency

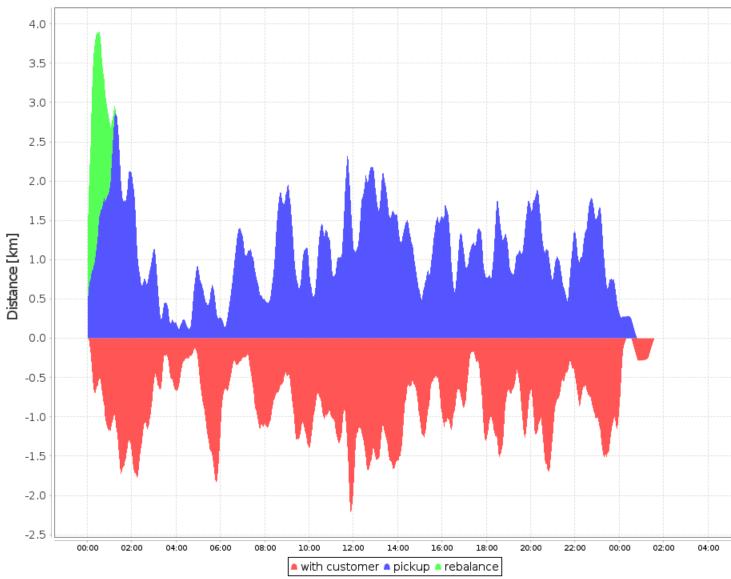


Distance Distribution over Day

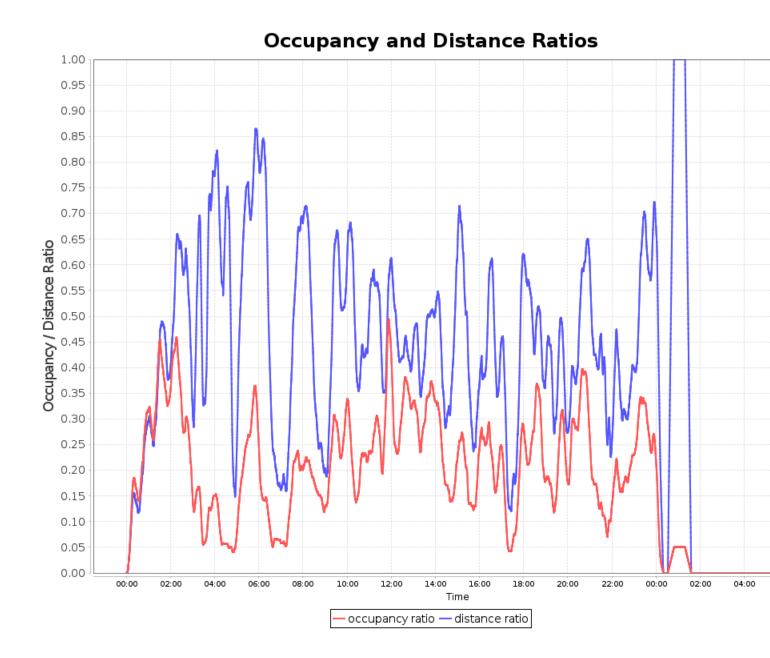


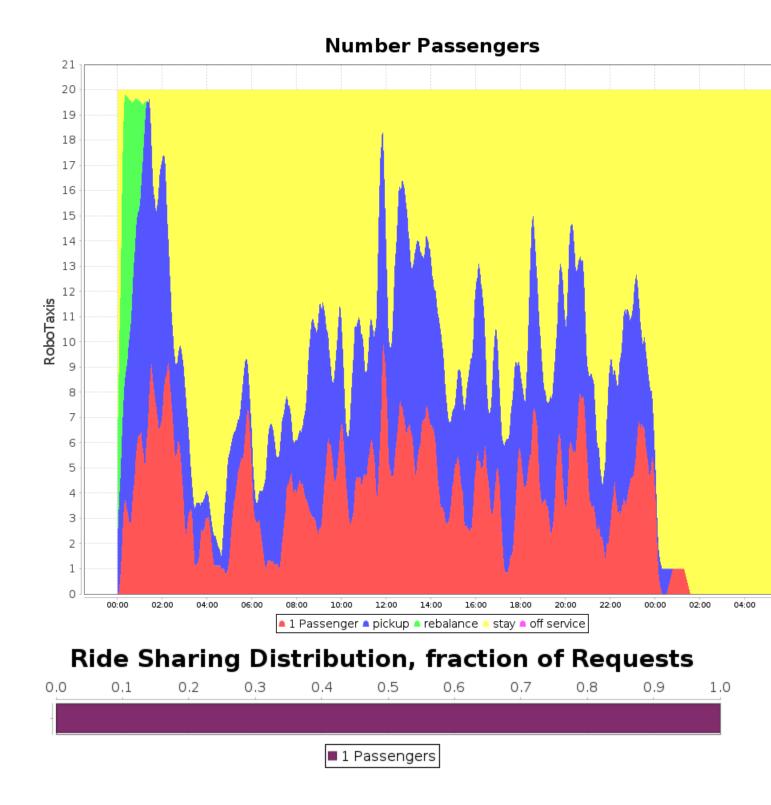


Aido Scores

Scores during Simulation

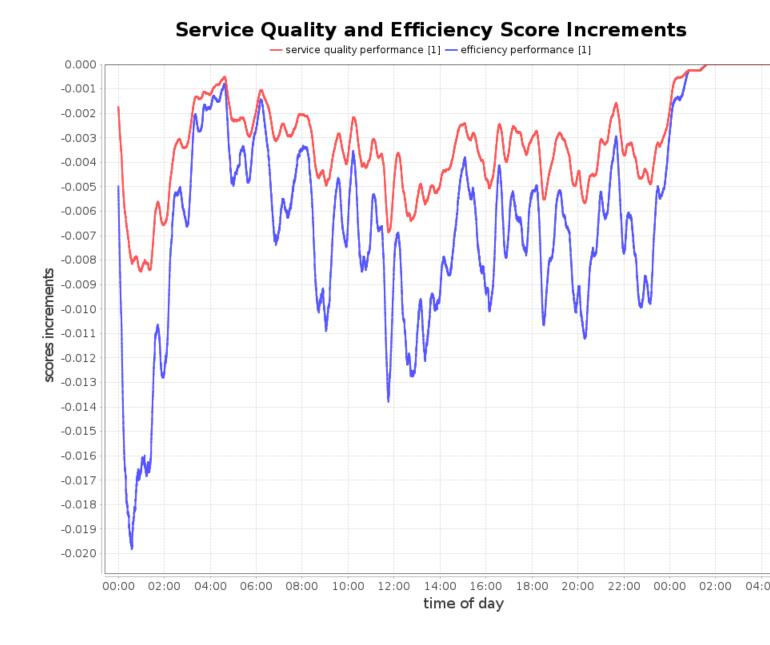

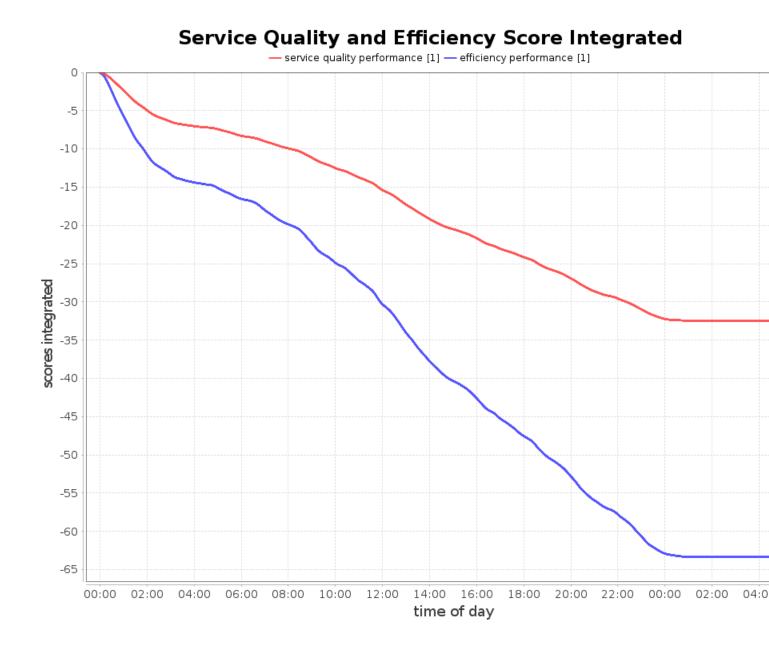

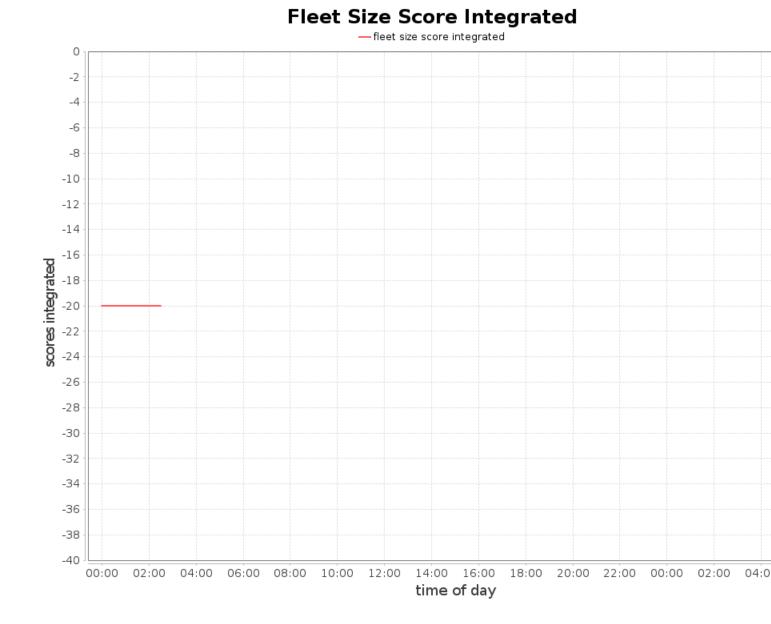

Final Scores

final service quality score: final efficiency score:

final fleet size score:

-32.48664809260989 -63.339432370436896 -Infinity

www.amodeus.science www.idsc.ethz.ch